

## Colorcoat Prisma™ - Textured

### Aesthetics that last. Guaranteed


Colorcoat Prisma™ utilises cutting edge three layer manufacturing technology to create an optimised and robust pre-finished steel product now available in a textured finish.

#### Product benefits:







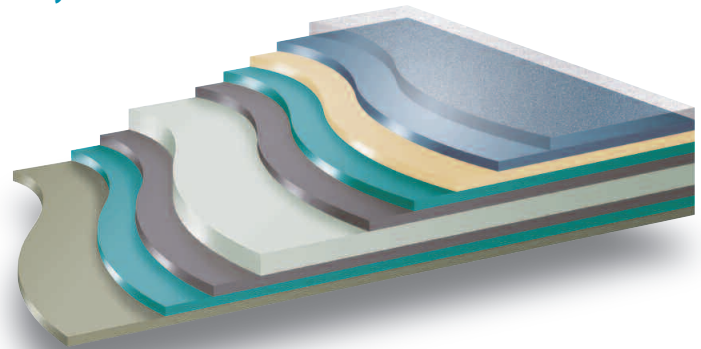


- Revolutionary 3 layer coating technology, with an optimised thicker clearcoat to achieve a true textured effect.
- The most matt option as part of the Colorcoat Prisma™ range with gloss less than 5%.
- Meets the highest European standards for corrosion and UV resistance (Ruv4 and RC5 as per EN 10169).
- Robust and durable topcoat for easier handling and processing.
- Optimised Galvalloy® metallic coating for ultimate corrosion resistance and cut edge protection.
- Independently tested for liberation of volatile organic compounds (VOC) against EN ISO 16000-9 and achieved an A+ rating.
- Fully REACH compliant & free of chromates including hexavalent chrome.
- Made in the UK. Certified to BES 6001 Responsible Sourcing Standard.

#### Colorcoat Prisma™ by Tata Steel

##### 3 layers - Textured



#### Key:


	20µm additional protective textured clear layer		Base steel substrate
	25µm coloured layer with polyamide beads		Galvalloy® metallic coating
	25µm corrosion resistant primer		Pre-treatment
	Pre-treatment		High performance backing coat
	Galvalloy® metallic coating		

#### Typical applications

Colorcoat Prisma™ with a textured clearcoat has a nominal thickness of 70 microns and makes it an ideal choice for both roof and wall cladding of commercial, retail, warehouse, public sector and superior aesthetic buildings. The end result provides a natural effect with the illusion of depth giving a sophisticated high end building finish.

#### Galvalloy™

Colorcoat Prisma™ uses the unique and proven Galvalloy™ metallic coating by Tata Steel. Galvalloy® is made with a special mix of 95% Zinc (Zn) and 5% Aluminium (Al) that conforms to EN 10346:2015. The carefully developed proportions of Zinc and Aluminium in Galvalloy® offers a combination of increased barrier and sacrificial protection when compared with conventional Hot Dip Galv (HDG) coatings and provides unrivalled corrosion protection, even at the cut edges.

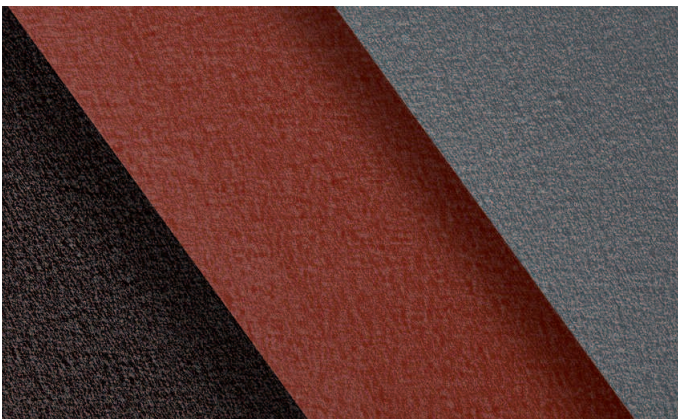

# Colorcoat Prisma™ - Textured

## Colour availability

Any Solid or Metallic shade that is found on the Colorcoat Prisma™ colourcard is available with a textured clearcoat. For physical hand samples please contact the Colorcoat Connection® helpline.

Colour information is available related to each Textured, Solid and Metallic shade including Solar Reflective Index (SRI), Steady State Surface Temperature (SSST) and Light Reflectance Values (LRV), please contact us for more information.

In addition, through our Repertoire® colour consultancy service, we can match almost any Solid colour which can be produced with a textured clearcoat. With a minimum order quantity of 5,000m<sup>2</sup>, this gives a wide choice of options for your building.

## Typical properties

Colorcoat Prisma™ - Textured			Test standard
Nominal organic coating thickness: Textured	(μm)*	70	EN 13523-1
Specular gloss (60°): Textured	(%)	<5	EN 13523-2
Scratch resistance: Textured	(g)	>3000	EN 13523-12
Abrasion resistance: (Taber, 250 rev. 2 kg, CS10) Textured	(mg)	<18	EN 13523-16
Flexibility: Minimum bend radius	(T)	0.5T@16°C	EN 13523-7
Reverse impact	(J)	≥18	EN 13523-5
Adhesion (cross hatch)	%	100	EN 13523-6
Pencil hardness		H	EN 13523-4
Maximum continuous operating temperature	°C	90	
Corrosion resistance: Salt spray	(h)	1000	EN 13523-8
Humidity	(h)	1500	EN 13523-26
Corrosion resistance category		RC5 CPI5	EN 10169
UV category		Ruv4	EN 10169

\*μm = micron

### Notes

- The figures contained in this table are typical properties and do not constitute a specification. Tested in accordance with EN 13523. For details on test methods visit [www.colorcoat-online.com](http://www.colorcoat-online.com)
- For health and safety datasheets contact the Colorcoat Connection™ helpline on +44 (0) 1244 892434.

## Fire performance

### Reaction to fire

Colorcoat Prisma™ - Textured has been tested to EN 13823 and EN ISO 1716 and can be classified in accordance with EN 13501-1 as A2-s1, d0. This classification is valid for all gauges ≥ 0.47mm and for all colours in the product range for single sided product.

### Performance of roof coverings

Colorcoat Prisma™ - Textured is deemed to satisfy, without the need for further testing, the requirements for external fire performance of roof covering products in accordance with Commission Decision 2000/553/EC. This is valid for all gauges ≥ 0.4mm and for all colours in the product range for single sided product.

# www.colorcoat-online.com

Contact details:

### Tata Steel

Shotton Works, Deeside,  
Flintshire, CH5 2NH.  
United Kingdom

### Colorcoat Connection™ helpline

T: +44 (0) 1244 892434

E: [colorcoat.connection@tatasteel.com](mailto:colorcoat.connection@tatasteel.com)

W: [www.colorcoat-online.com](http://www.colorcoat-online.com)

Tata Steel UK Limited is registered in England under number 2280000 with registered office at 18 Grosvenor Place, London, SW1X 7HS.

### Trademarks of Tata Steel UK Limited

Colorcoat, Colorcoat Connection, Colorcoat Prisma, Galvalloy and Repertoire are trademarks of Tata Steel UK Limited.

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, (including Tata Steel UK Limited), do not accept responsibility or liability for errors or information that is found to be misleading. Suggestions for, or descriptions of, the end use or application of products or methods of working are for information only and Tata Steel Europe Limited and its subsidiaries accept no liability in respect thereof.

Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

Copyright 2021 Tata Steel  
Language English ROW 0421