


TECHNICAL ADVICE DOCUMENT

Wide coil in cradle secured individually

1. This technical advice document applies to


- Coils loaded in cradles.
- Coils with maximum weight of up to 7 tonnes.
- Diameter less than 1.4 times sheet width.

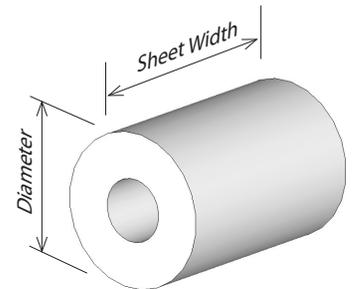

2. Essential requirements

- All webbing straps must have a minimum LC of 2000daN, and must be compliant with EN 12195-2.
- Edge protection must be applied to webbing straps in contact with all sharp edges and the trailer chassis.

3. Restraint system overview

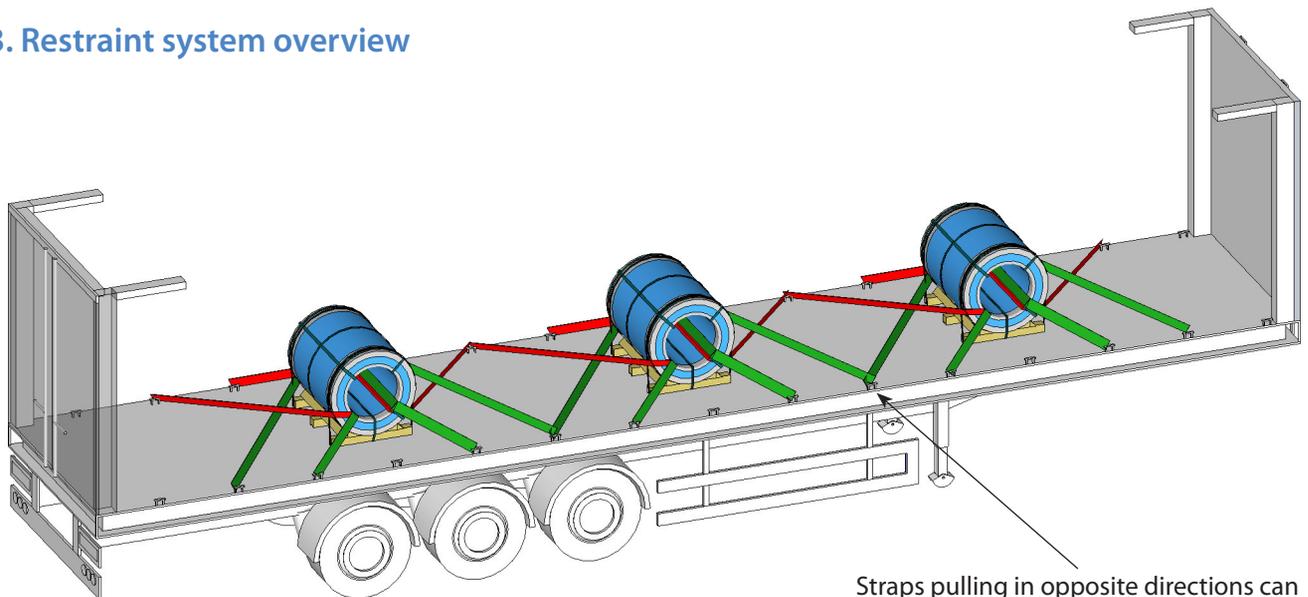

- ✓ 4 straps per coil.
- ✓ Straps pulling in opposite directions.



Note:
 Ensure that edge protection is applied to webbing straps in contact with sharp edges including the trailer chassis.

