

Valast® 450

Abrasion resistant strip for long-lasting performance

Developed for construction, mining and agricultural applications, abrasion resistant Valast 450 steel sheet withstands harsh wear and tear whilst maintaining lasting quality. With a typical hardness of 450 HBW, abrasion resistance is up to 2.5 times greater than S355 structural steel*. Users benefit from extended operational life and reduced maintenance costs. Valast 450 also enables production of lighter, more fuel-efficient vehicles or greater payloads if steel thicknesses are reduced in vehicles.

Valast 450 is available in extra-wide strip dimensions (2m) and customised lengths. Combined with consistent flatness, this allows

efficient, repeatable processing with improved nesting yield, and minimised waste and part rejection rate. A low CET ensures that Valast 450 is suitable for all conventional welding methods. Tata Steel's hot-rolled Valast 450 strip surface quality offers potential for a reduction of shot blasting and pre-painting requirements.

Typical applications of hard-wearing Valast 450 include tipper and dumper truck bodies, asphalt pavers, crushing and screening equipment, concrete mixer trucks and garbage trucks.

*Abrasive Wear Test ASTM G65

Mechanical properties

	Hardness	Yield strength*	Tensile strength*	Elongation*	Bending radius**
4 ≤ thickness ≤ 8mm	HBW	R _{p0.2} (MPa)	R _m (MPa)	L ₀ = 5.65 √S ₀ (%)	
Guaranteed	420-480				4.5t
Typical value	450	1250	1475	9	-

* Mechanical properties are tested in longitudinal direction

** Minimal radius at bending over 90° - bend line parallel to the rolling direction

Chemical composition

	C	Mn	P	S	Si	Al _{sol}	Nb	V	Ti	Mo	B
Guaranteed	≤ 0.230	≤ 1.000	≤ 0.020	≤ 0.005	≤ 0.100	≥ 0.015	≤ 0.060	≤ 0.100	≤ 0.060	≤ 0.250	≤ 0.005

All values are in weight%

Impact strength

Direction	Temperature	Guaranteed
Longitudinal	-40°C	≥ 34 J/cm ² *

* A value of 34 J/cm² corresponds to 27J for a full size 10x10mm test piece

Tolerances

Thickness

Complies with ½ EN 10051.

Length, width, shape and flatness

Complies with EN 10051. Tighter tolerances available on request.

Weldability


Tata Steel's investment in a research and development programme has ensured a low CET of less than 0.33 in Valast 450 steel – ensuring that all conventional welding methods can be used.

CEV max	CET max	PCM max
0.45	0.33	0.32

Surface

Valast 450 hot-rolled strip offers superior surface quality when compared with reversing mill plate in 'as rolled' condition.

Dimensional window of Valast® 450

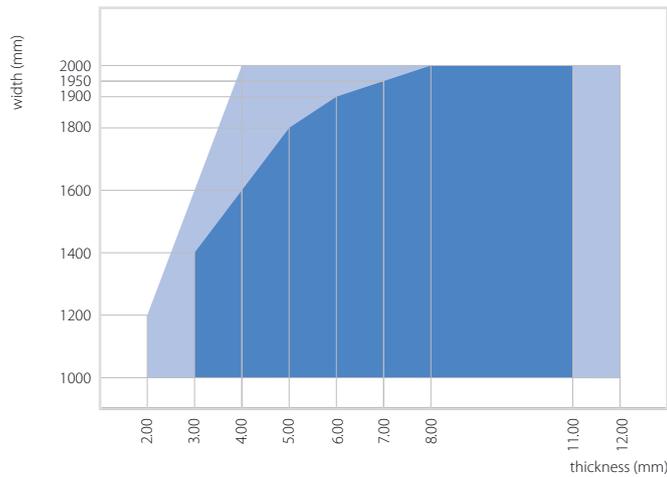

- Available
- Please contact for availability

For coil orders below 1500mm width, a minimum order quantity may apply. Please contact us to discuss.

Certification

A 3.1 certificate is issued with Valast 450. Other certificate types are available on request.

Product support

Our proactive customer technical services team offers technical consultancy and practical, hands-on support to help you to get the best from Valast 450. Using our steel know-how and application knowledge, we can assist you in maximising processing efficiency and end product performance.

Further information

E: connect.engineering@tatasteel.com

www.tatasteel.com

Valast® is a registered trademark of Tata Steel.

While care has been taken to ensure that the information contained in this publication is accurate, neither Tata Steel, nor its subsidiaries, accept responsibility or liability for errors or for information which is found to be misleading. Before using products or services supplied or manufactured by Tata Steel and its subsidiaries, customers should satisfy themselves as to their suitability.



Scan the latest product information

Tata Steel

PO Box 10.000
1970 CA IJmuiden
The Netherlands

E: connect.engineering@tatasteel.com
www.tatasteel.com/engineering

E0041:EN:PDF:1221

Copyright 2021
Tata Steel Europe Limited